

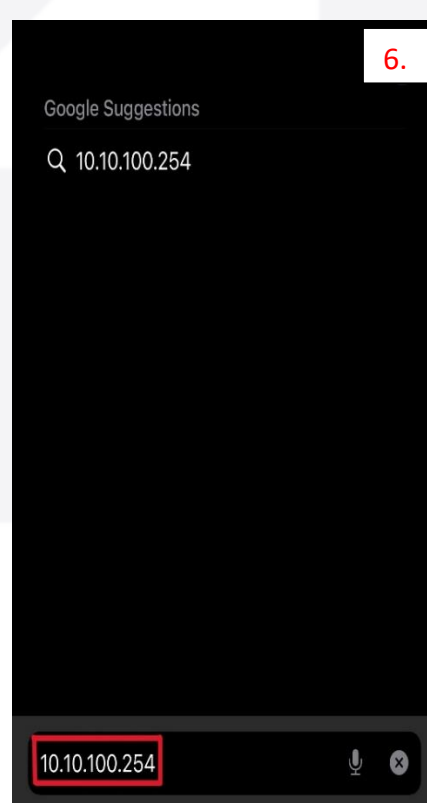
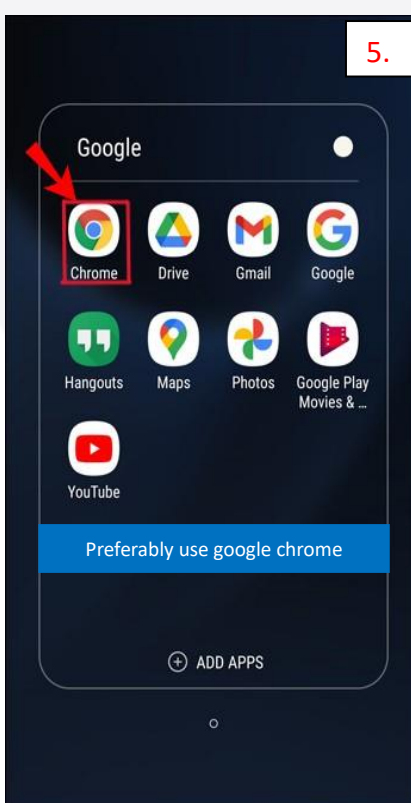
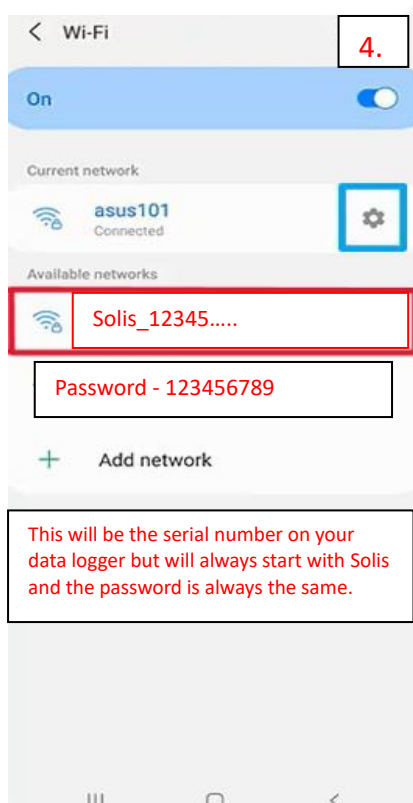


Solis Data Logger Reconfiguration

Please follow the steps below to complete a data logger reconfiguration. Zoom in to document (140%)

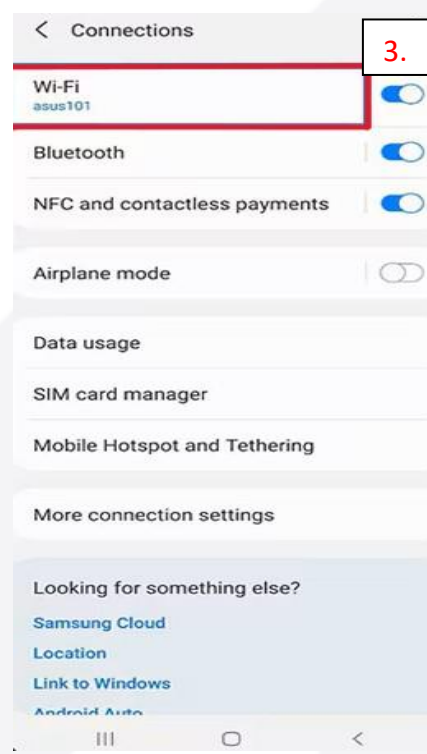

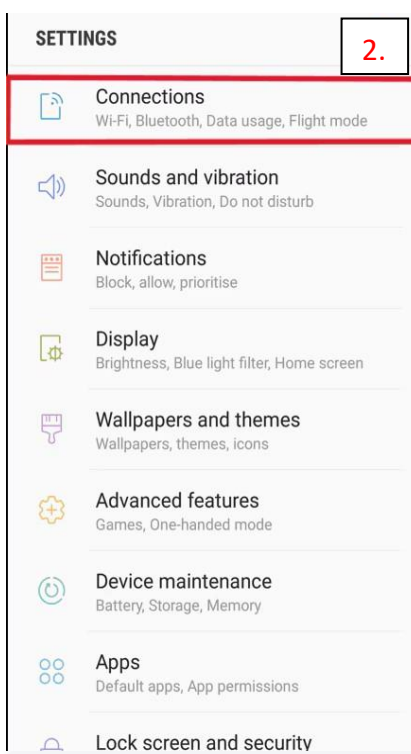

7.

Sign in to 10.10.100.254
Your password will be sent unencrypted.

Username	admin
Password	123456789 or admin

[Cancel](#) [Sign In](#)

 Sign in to website 

8.

- Status
- Quick Set**
- Advanced
- Restart
- Reset

- Inverter information

Inverter serial number 0000000000000000

Firmware version 140010

Inverter model F9

Inverter temperature 20.0°C

Current power 0W

Yield today 0.000000kWh

Total yield dkWh

Alerts NO

Last updated 6s

+ Device information

+ Remote server information

9.

Status

Quick Set

Advanced

Restart

Reset

Network name(SSID)
(Note:case sensitive)

Search

Password(8-64 bytes)
(Note:case sensitive)Obtain an IP address
automatically

Enable

IP address

Subnet mask

Gateway address

DNS server address

Note:After clicking Save,the stick will restart immediately. If connection is successful,the wireless AP mode of the stick will be disabled. If not,you need to re-login to redo the configuration.

Save

10.

Please select your current wireless network

Site Survey

SSID

RSSI(%)



HomeSmartEnergy

96



This will be your
home network

Note:When RSSI/signal strength of the selected WiFi network is less than 15%,the connection may be unstable,please select another available network or improve the signal strength.

OK

Refresh

11.

Network name(SSID)
(Note:case sensitive)

HomeSmartEnergy

Search

Password(8-64 bytes)
(Note:case sensitive)

.....

This will be your home
networks Wi-Fi
password

DNS server address

Note:After clicking Save,the stick will restart immediately. If connection is successful,the wireless AP mode of the stick will be disabled. If not,you need to re-login to redo the configuration.

Save



10.10.100.254



This Procedure is now complete. Although it states this will work within 10 seconds this can take as long as 15 minutes. If you need to contact us regarding this, please email us at tsa@hsenergy.co.uk or 01444708252