


FOX ESS DATALOGGER RECONFIGURATION PROCESS

1) Connect your phone or computer to your Data Logger's Wi-Fi.

The Wi-Fi Name of the Data Logger Wi-Fi is 'W-XXXXX', and the password is 'mtmt2020'.

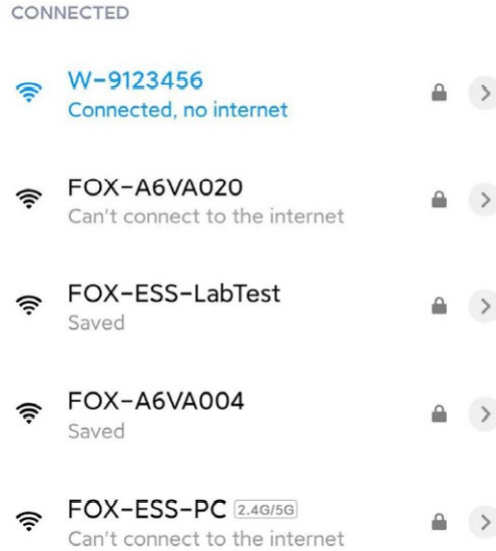

2) Once you have connected successfully, open any internet browser, and enter '192.168.1.1' into the address bar.



3) Scroll down to the section called 'Wi-Fi SSID'.

Click this section and it will give you a drop-down menu to find your home Wi-Fi.

Input the Wi-Fi password and Click 'Save'.

Set-up net

IP: 192.168.10.148

Mac: ec:fa:bc:3f:53:fb

Wifi SSID: FOX-A6VA020

Password: Composed of letters,numbers or und

Buttons: Save, Refresh, Clear

Local upgrade

SN: 009W2D41A6VA009

Software version: 0.6

Hardware version: 2.0

Select File: Please (Only .bin files can be uploaded)

Progress: 0%

Buttons: Upgrade, Clear